



# NEROLAC


## NEROCEM

CEMENT PAINT

### PRODUCT DESCRIPTION

Kansai Nerolac Nerocem is a combination of aesthetic appeal and longevity. It is an economical exterior wall finish which is highly resistant to fungus/algae and protects buildings from varying weather conditions.

### PERFORMANCE FEATURES & BENEFITS

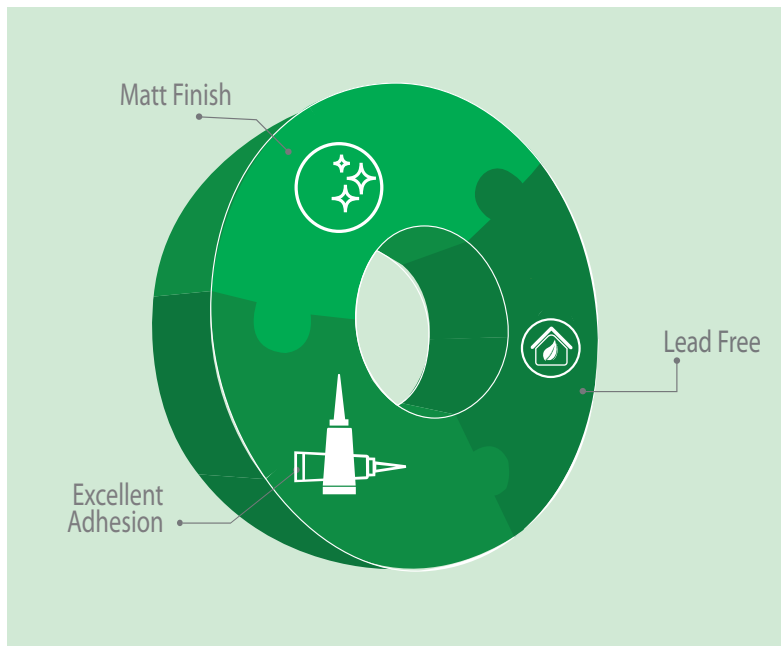

### RECOMMENDED USAGE

For use on exterior and interior surfaces i.e. cement plaster, concrete, masonry, brick work, asbestos, rendered block work, etc.

### SURFACE PREPARATION

- 1** Plaster New masonry surface must be allowed to cure, completely. It is recommended to allow at least 4-7 weeks for fully curing.
- 2** Surface Preparation Cleaning Surface should be free from any loose particles, dust, grease or other contaminants. Growth of fungus algae or moss should be removed by wire brushing and water. It should be clean, dry and well primed.
- 3** Sealer / Primer After proper surface preparation and cleaning use Kansai Nerolac Exterior Primer and allow at least 6 hours for drying. For smooth finish apply Kansai Nerolac Exterior Wall Putty.
- 4** Filling For Holes & Dents If any dents and holes are present on underlying surface please fill it by Kansai Nerolac Exterior Wall Putty. If needed, apply 2nd coat putty after 8-10 hours of 1st coat. Once putty is dried completely (18- 24 hours) then rub with 180 sand paper and apply finish coat.

### RECOMMENDED SYSTEM FOR APPLICATION

- 1** Kansai Nerolac Exterior Primer \*\* (1 Coat) Dry in 4 - 6 hrs
- 2** Kansai Nerolac Nerocem \*\* (2 coats) Dry min. 4 - 6 hrs. in between coats.



## TECHNICAL DATA



### COVERAGE\*\*

60 – 80 sft/kg@60 - 40 μ respectively.



### DRYING TIME

Surface Dry : 30 - 90 Minutes



### RECOATING

4 - 6 hours under normal drying conditions.



### GLOSS LEVEL

Matt



### THINNING

Add 1 Lit of Water to 1 Kg of Cement Paint



### FLASH POINT

NA



### STABILITY OF THINNED PAINT

Use within 01 hrs



### DRY FILM THICKNESS (IN MICRONS)/COAT

40 - 60 microns



### WASHABLE

Moderate

\*\*Actual coverage may vary depending on Method. Condition of Application. Surface Porosity & Shade.

## PRECAUTIONS



- 01) Stir the content well before use.
- 02) Store in a cool and well ventilated place, protected from heat and direct sunlight.
- 03) Shelf life: 12 months from the date of manufacture of original sealed containers under normal conditions.
- 04) Keep out of reach of children's.
- 05) Use under well ventilated conditions.
- 06) Avoid contact with eyes and skin. Use protective clothing such as overalls, goggles, masks and gloves during application.
- 07) Spillage on skin should be removed immediately with water, cleanser or soap.
- 09) Eyes should be properly flushed with water and medical attention sought immediately.
- 09) In the event of inhalation seek medical attention immediately.

### SAFETY FEATURES:



Non-Flammable.

### PACK SIZES:



5 kg, 20 kg and 40 kg.

### COLOR:

As per Nerocem Cement Paint shade card.

